



8-Way Power Dividers/Combiners

NPD8-600-6000

8-Way, 0.6~6GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	0.6~6GHz
Insertion Loss:	2.8dB max. (SMA) 3.2dB max. (N)
Input VSWR:	1.4 max.
Output VSWR:	1.3 max.
Isolation:	20dB min. (SMA) 18dB min. (N)
Amplitude Balance:	0.4dB max.
Phase Balance:	$\pm 5^\circ$
Impedance:	50 Ω
Average Power:	30W max. 2W max. as combiner

Mechanical

Mounting:	4- Φ 3.2mm through-hole (SMA) 4- Φ 4.2mm through-hole (N)
-----------	--

Environmental

Operation Temperature:	-35~+75°C
------------------------	-----------

How To Order

NPD8-600-6000-X-Y

X: Average power as divider

Y: Connector type

Connector naming rules:

S - SMA Female (Outline A)


N - N Female (Outline B)

Examples:


To order a 8-way power divider, 0.6~6GHz, 30W, N female, specify NPD8-600-6000-30-N.

Customization is available upon request.

Outline Drawings

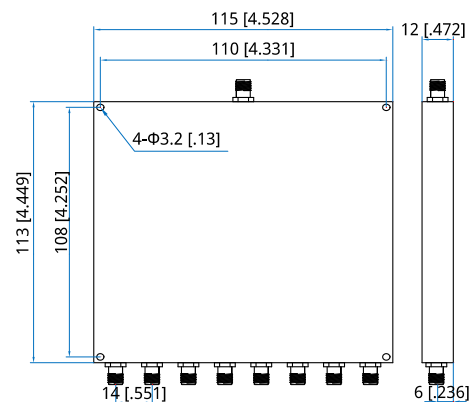

Outline A

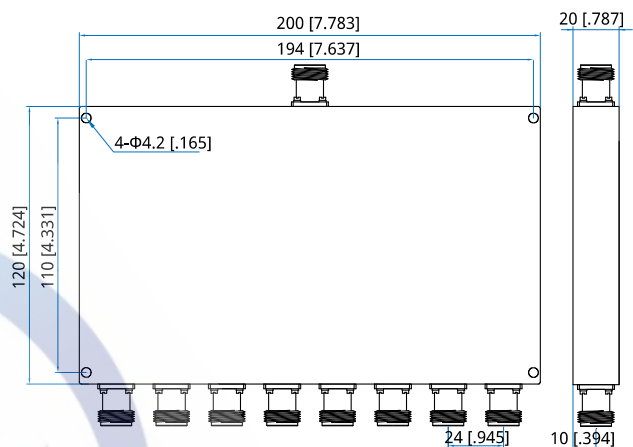

Outline B

Unit: mm [in]

Tolerance: ± 0.5 mm [± 0.02 in]