

NDI1313T

High Power, High Isolation

Features:

- * High Power
- * High Isolation
- * Low Insertion Loss
- * Low VSWR

Applications:

- * Wireless
- * Radar
- * Laboratory Test


Description

NDI1313T series Drop-In Isolators cover frequency range 1700~6000MHz. High power, high isolation and low insertion loss make it ideal for a lot of applications like amplifiers, transceivers, etc.

Specifications

Frequency (MHz)	Bandwidth (MHz)	Insertion Loss (dB Max.)	Isolation (dB Min.)	VSWR (Max.)	Fwd Power (W Max.)	Rev Power (W)	Temperature (°C)
1710~1785	75	0.30	23.0	1.20	60	20	-30~+70
1805~1880	75	0.30	23.0	1.20	60	20	-30~+70
1805~1920	115	0.40	20.0	1.25	60	20	-30~+70
1880~1920	40	0.30	23.0	1.20	60	20	-30~+70
2110~2170	60	0.30	23.0	1.20	60	20	-30~+70
2300~2400	100	0.30	23.0	1.20	60	20	-30~+70
2400~2500	100	0.30	23.0	1.20	60	20	-30~+70
2500~2700	200	0.30	23.0	1.20	60	20	-30~+70
2700~2900	200	0.30	23.0	1.20	60	20	-30~+70
2900~3100	200	0.30	23.0	1.20	60	20	-30~+70
3000~5000	200	0.35	20.0	1.25	60	20	-30~+70
3250~3450	200	0.35	20.0	1.25	60	20	-30~+70
3300~3500	200	0.35	20.0	1.25	60	20	-30~+70
3500~3650	150	0.35	20.0	1.25	60	20	-30~+70
5100~5900	800	0.45	18.0	1.30	60	20	-30~+70
5700~5900	200	0.40	20.0	1.25	60	20	-30~+70

Outline Drawings

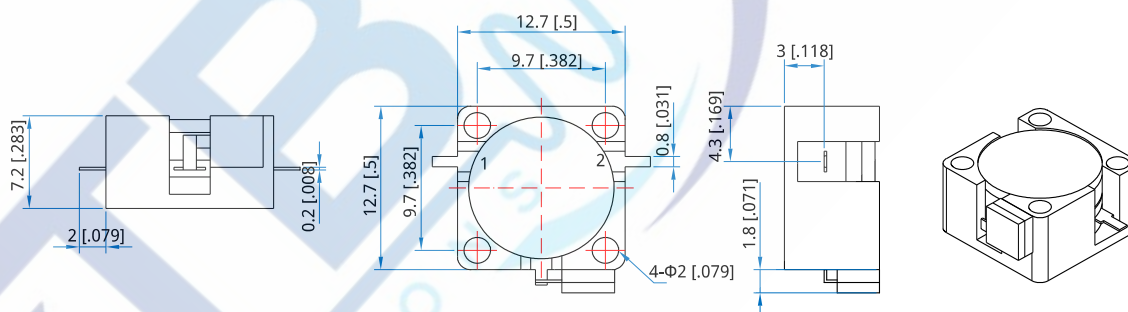

Unit: mm [inch]

Tolerance: ±0.2mm [±0.008in]



NDI1313T

Mechanical

Size* ¹ :	12.7*12.7*7.2mm 0.5*0.5*0.283in
Connector Type:	Strip line
Mounting:	4-Φ2mm through-hole

[1] Exclude connectors and terminations.

How To Order

NDI1313T-X-Y-Z

X: Start frequency in MHz

Y: Stop frequency in MHz

Z: Reverse Power in W

Examples:

To order a NDI1313T series Isolator, 3300~3500MHz,
20W, specify NDI1313T-3300-3500-20.

Customization is available upon request.

