

NPD6-500-6000

6-Way, 0.5~6GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	0.5~6GHz
Insertion Loss:	3.0dB max. (SMA) 4.0dB max. (N)
Input VSWR:	1.5 max.
Output VSWR:	1.3 max.
Isolation:	18dB min.
Amplitude Balance:	0.8dB max. (SMA) 1.0dB max. (N)
Phase Balance:	±8° (SMA) ±10° (N)
Impedance:	50Ω
Average Power:	30W max. 2W max. as combiner

Mechanical

Mounting: 4-Φ3.2mm through-hole

Environmental

Operation Temperature: -35~+75°C

How To Order

NPD6-500-6000-X-Y

X: Average power as divider

Y: Connector type

Connector naming rules:

S - SMA Female (Outline A)


N - N Female (Outline B)

Examples:


To order a 6-way power divider, 0.5~6GHz, 30W, N female, specify NPD6-500-6000-30-N.

Customization is available upon request.

Outline Drawings

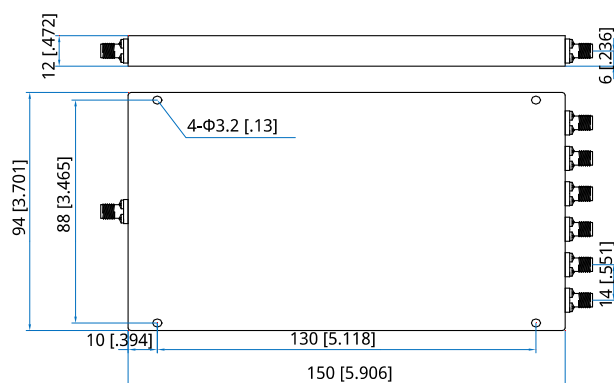

Outline A

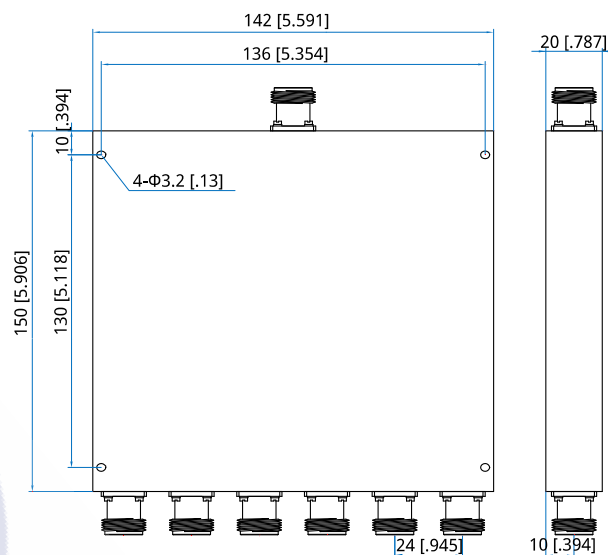

Outline B

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]