

NPD12-240

12-Way, 240MHz

Features:

- * Broadband
- * Low Insertion Loss
- * High Power

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	240MHz
Insertion Loss:	0.8dB max.
Input VSWR:	1.3 max.
Output VSWR:	1.2 max.
Isolation:	20dB min.
Amplitude Balance:	0.5dB max.
Phase Balance:	$\pm 4^\circ$
Impedance:	50 Ω
Average Power:	30W max. 2W max. as combiner

Mechanical


Size ^{*1} :	280*152*14mm 11.024*5.984*0.551in
Connectors:	SMA Female
Mounting:	4- Φ 4.4mm through-hole 5-M3

[1] Exclude connectors.

Environmental

Operation Temperature: -35~+75°C

Outline Drawings

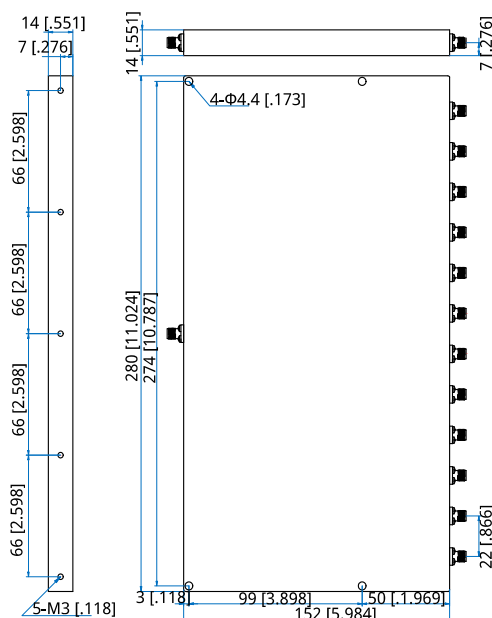

Unit: mm [in]

Tolerance: ± 0.5 mm [± 0.02 in]

How To Order

NPD12-240

Customization is available upon request.