

NDI6060H

High Power, High Isolation

Features:

- * High Power
- * High Isolation
- * Low Insertion Loss
- * Low VSWR

Applications:

- * Wireless
- * Radar
- * Laboratory Test

Description


NDI6060H series Drop-In Isolators cover frequency range 20~400MHz. High power, high isolation and low insertion loss make it ideal for a lot of applications like amplifiers, transceivers, etc.

Specifications

Frequency (MHz)	Bandwidth (MHz)	Insertion Loss (dB Max.)	Isolation (dB Min.)	VSWR (Max.)	Fwd Power (W Max.)	Rev Power (W)	Temperature (°C)
20~30	0	2.0	18.0	1.30	100	10~100	-20~70
30~80	0	1.20	20.0	1.25	100	10~100	-20~70
30~80	5	1.80	18.0	1.30	100	10~100	-20~70
88~108	20	0.60	20.0	1.25	100	10~100	-20~70
100~140	40	1.20	18.0	1.30	100	10~100	-20~70
108~118	10	0.50	20.0	1.20	100	10~100	-20~70
116~138	22	0.60	20.0	1.25	100	10~100	-20~70
130~180	50	0.60	20.0	1.25	100	10~100	-20~70
136~174	38	0.50	20.0	1.25	100	10~100	-20~70
150~170	20	0.40	20.0	1.20	100	10~100	-20~70
170~230	60	0.60	20.0	1.25	100	10~100	-20~70
225~400	175	0.80	18.0	1.30	100	10~100	-20~70

The size of the termination varies according to the reverse power

Outline Drawings

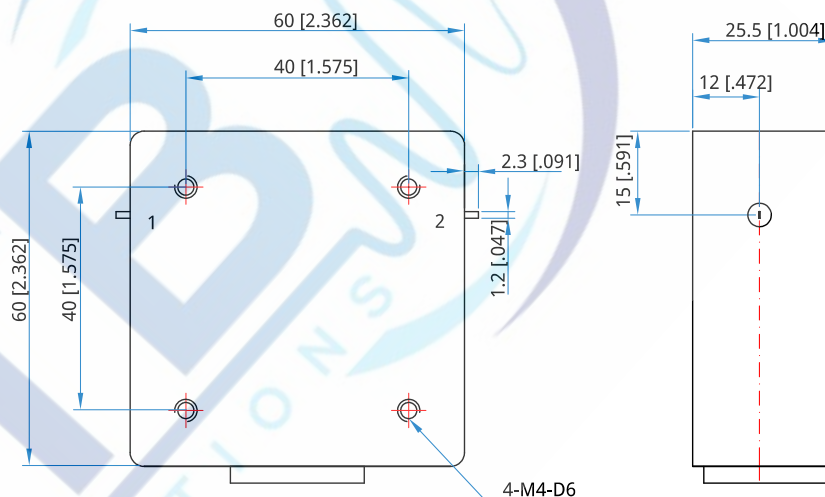

Unit: mm [inch]

Tolerance: ±0.2mm [±0.008in]



NDI6060H

Mechanical

Size ^{*1} :	60*60*25.5mm 2.362*2.362*1.004in
Connector Type:	Strip line
Mounting:	4-M4, depth 6mm

[1] Exclude connectors and terminations.

How To Order

NDI6060H-X-Y-Z

X: Start frequency in MHz

Y: Stop frequency in MHz

Z: Reverse Power in W

Examples:

To order a NDI6060H series Isolator, 60~88MHz, 20W, specify NDI6060H-60-88-20.

Customization is available upon request.

