

## NPD2-0-10000

2-Way, DC~10GHz, 0.5W

**Features:**

- \* Small Size
- \* Low Insertion Loss

**Applications:**

- \* Amplifiers
- \* Mixers
- \* Antennas
- \* Laboratory Test

**Electrical**

---

Frequency:	DC~10GHz
Insertion Loss:	6±1.5dB max.
VSWR:	1.5 max.
Amplitude Balance:	±0.8dB max.
Impedance:	50Ω
Power Handling:	0.5W

**Mechanical**

---

Size <sup>*1</sup> :	28*24.2*12mm 1.102*0.953*0.472in
Connectors:	SMA Female


[1] Exclude connectors.

**Environmental**

---

Operation Temperature: -35~+75°C

**Outline Drawings**

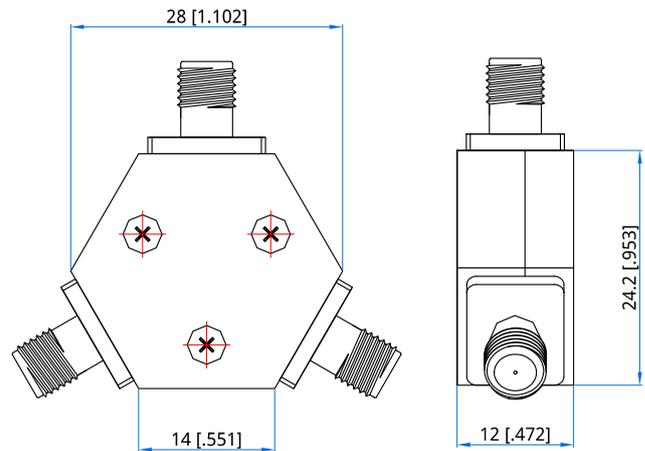

Unit: mm [in]  
Tolerance: ±0.5mm [±0.02in]

**How To Order**

**NPD2-0-10000**

Customization is available upon request.

