

NPD2-0-6000

2-Way, DC~6GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	DC~6GHz
Insertion Loss:	6.8dB max.
Input VSWR:	1.3 max.
Output VSWR:	1.3 max.
Isolation:	5.6dB min.
Amplitude Balance:	0.3dB max.
Phase Balance:	$\pm 3^\circ$
Impedance:	50 Ω
Average Power:	2W

Mechanical

Mounting:	3- Φ 2.7mm through-hole (SMA) 4-M2.5, depth 5mm (N)
-----------	---

Environmental

Operation Temperature:	-35~+75°C
------------------------	-----------

How To Order

NPD2-0-6000-X-Y

X: Average power

Y: Connector type

Connector naming rules:

S - SMA Female (Outline A)


N - N Female (Outline B)

Examples:


To order a 2-way resistive power divider, DC~6GHz, 2W, N female, specify NPD2-0-6000-2-N.

Customization is available upon request.

Outline Drawings



Outline A

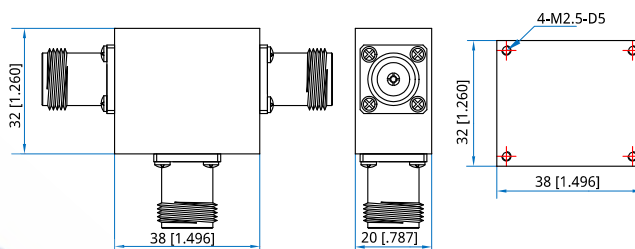

Outline B

Unit: mm [in]

Tolerance: ± 0.5 mm [± 0.02 in]