

NPD2-4000-8000

2-Way, 4~8GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	4~8GHz
Insertion Loss:	0.3dB max. (SMA) 0.5dB max. (N)
Input VSWR:	1.25 max.
Output VSWR:	1.2 max.
Isolation:	20dB min.
Amplitude Balance:	0.2dB max.
Phase Balance:	$\pm 2^\circ$
Impedance:	50 Ω
Average Power:	30W max. 2W max. as combiner


Mechanical

Mounting:	3- Φ 2.7mm through-hole (SMA) 4- Φ 2.8mm through-hole (N)
-----------	--

Environmental

Operation Temperature:	-45~+85°C
------------------------	-----------

Outline Drawings

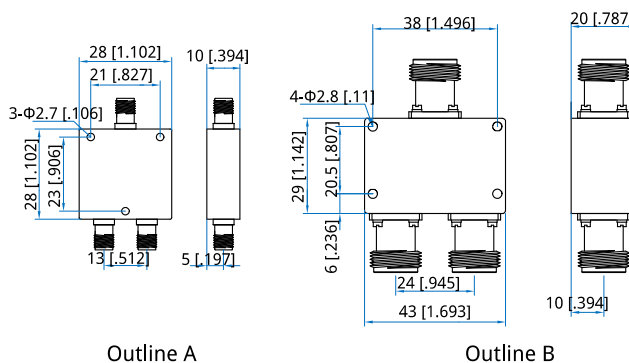

Unit: mm [in]
Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]

How To Order

NPD2-4000-8000-X-Y

X: Average power as divider

Y: Connector type

Connector naming rules:

S - SMA Female (Outline A)

N - N Female (Outline B)

Examples:

To order a 2-way power divider, 4~8GHz, 30W, N female, specify NPD2-4000-8000-30-N.

Customization is available upon request.