

NPD2-80-2000

2-Way, 0.08~2GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	0.08~2GHz
Insertion Loss:	1.8dB max.
Input VSWR:	1.25 max.
Output VSWR:	1.2 max.
Isolation:	19dB min. (SMA) 20dB min. (N)
Amplitude Balance:	0.2dB max.
Phase Balance:	$\pm 2^\circ$
Impedance:	50 Ω
Average Power:	30W max. 2W max. as combiner

Mechanical

Mounting: 4- Φ 3.4mm through-hole (SMA)

Environmental

Operation Temperature: -35~+75°C

How To Order

NPD2-80-2000-X-Y

X: Average power as divider

Y: Connector type

Connector naming rules:

S - SMA Female (Outline A)


N - N Female (Outline B)

Examples:


To order a 2-way power divider, 0.08~2GHz, 30W, N female, specify NPD2-80-2000-30-N.

Customization is available upon request.

Outline Drawings

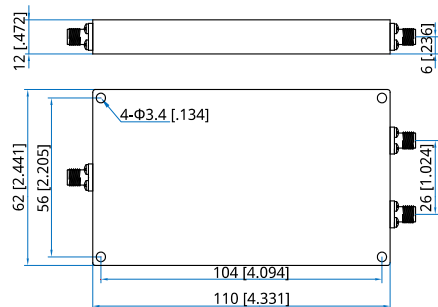

Outline A

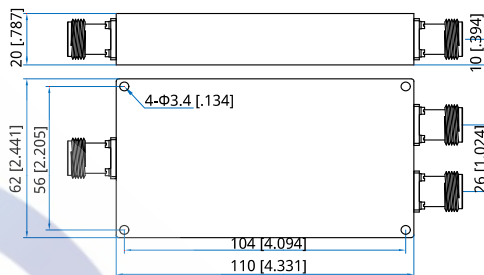

Outline B

Unit: mm [in]

Tolerance: ± 0.5 mm [± 0.02 in]