

NPD3-138-960-50-N

3-Way, 0.138~0.96GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	0.138~0.96GHz
Insertion Loss:	1.2dB max.
Input VSWR:	1.3 max.
Output VSWR:	1.25 max.
Isolation:	18dB min.
Amplitude Balance:	±0.6dB
Phase Balance:	±6°
Impedance:	50Ω
Average Power:	50W max. 3W max. as combiner

Mechanical


Size ^{*1} :	148*115*20mm 5.827*4.528*0.787in
Weight:	1000g
Connectors:	N Female
Mounting:	4-Φ4.4mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-35~+75°C
------------------------	-----------

Outline Drawings

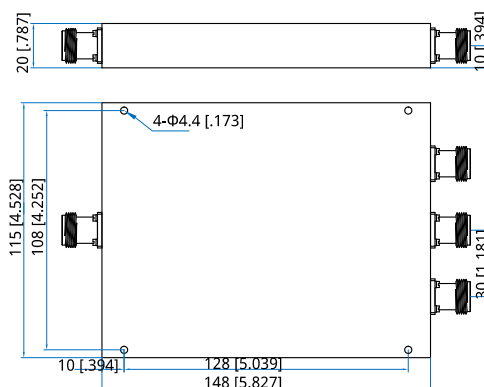

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

NPD3-138-960-50-N

Customization is available upon request.