

NPD3-600-6000

3-Way, 0.6~6GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	0.6~6GHz
Insertion Loss:	2.6dB max. (SMA) 2.8dB max. (N)
Input VSWR:	1.5 max.
Output VSWR:	1.4 max.
Isolation:	20dB min.
Amplitude Balance:	±0.8dB (SMA) 0.8dB max. (N)
Phase Balance:	±8°
Impedance:	50Ω
Average Power:	30W max. 2W max. as combiner

Mechanical

Mounting:	4-Φ2.8mm through-hole (SMA) 4-Φ3.2mm through-hole (N)
-----------	--

Environmental

Operation Temperature:	-35~+75°C
------------------------	-----------

How To Order

NPD3-600-6000-X-Y

X: Average power as divider

Y: Connector type

Connector naming rules:

S - SMA Female (Outline A)


N - N Female (Outline B)

Examples:


To order a 3-way power divider, 0.6~6GHz, 30W, N female, specify NPD3-600-6000-30-N.

Customization is available upon request.

Outline Drawings

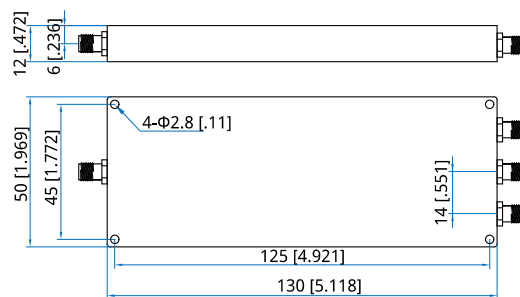

Outline A

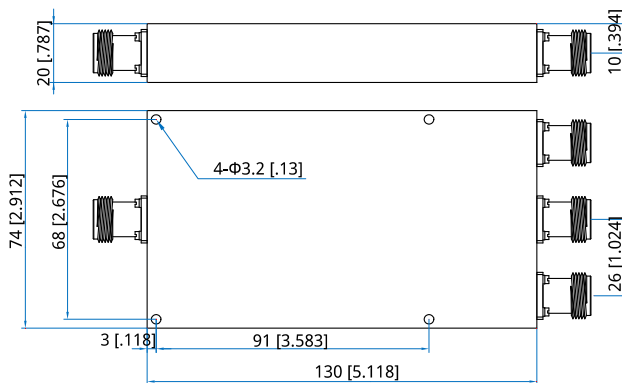

Outline B

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]