

NPD4-1000-2500

4-Way, 1~2.5GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	1~2.5GHz
Insertion Loss:	0.6dB max.
Input VSWR:	1.25 max.
Output VSWR:	1.2 max.
Isolation:	18dB min.
Amplitude Balance:	0.3dB max.
Phase Balance:	±4°
Impedance:	50Ω
Average Power:	100W max. 10W max. as combiner

Mechanical

Size*1:	114*110*22mm 4.488*4.331*0.866in
Weight:	650g
Mounting:	4-Φ4.4mm through-hole

Environmental

Operation Temperature: -35~+75°C

How To Order

NPD4-1000-2500-X-Y

X: Average power as divider

Y: Connector type

Connector naming rules:

N - N Female (Outline A)


NS - N Female & SMA Female (Outline B)

Examples:


To order a 4-way power divider, 1~2.5GHz, 100W, N female, specify NPD4-1000-2500-K1-N.

Customization is available upon request.

Outline Drawings

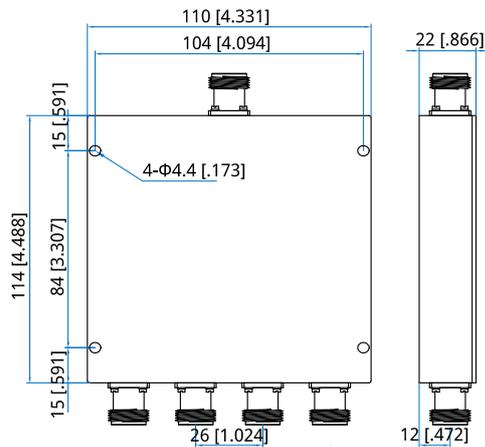

Outline A

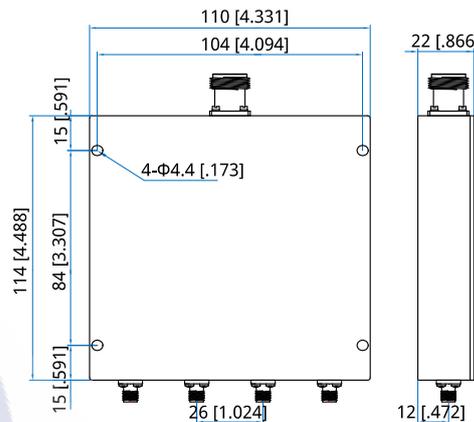

Outline B

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]