

NPD4-200-6000

4-Way, 0.2~6GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

| | |
|--------------------|---------------------------------|
| Frequency: | 0.2~6GHz |
| Insertion Loss: | 4.2dB max. |
| Input VSWR: | 1.4 max. |
| Output VSWR: | 1.25 max. |
| Isolation: | 18dB min. |
| Amplitude Balance: | 0.4dB max. |
| Phase Balance: | ±4° |
| Impedance: | 50Ω |
| Average Power: | 30W max. 2W max. as combiner |

Mechanical


| | |
|-------------|------------------------------------|
| Size*1: | 140*92*12mm 5.512*3.622*0.472in |
| Connectors: | SMA Female |
| Mounting: | 4-Φ3.2mm through-hole |

[1] Exclude connectors.

Environmental

Operation Temperature: -35~+75°C

Outline Drawings

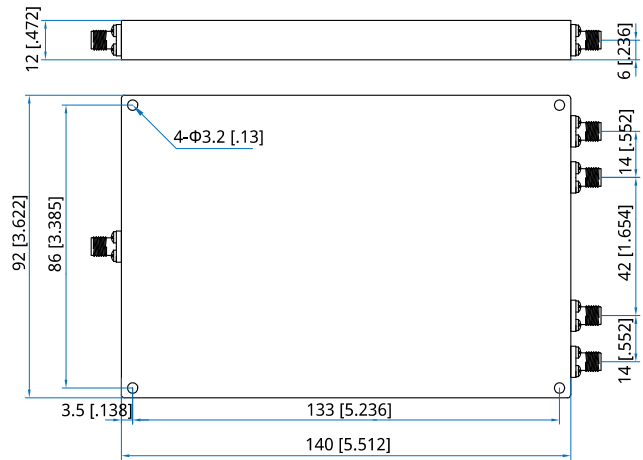

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

NPD4-200-6000

Customization is available upon request.

