

NPD4-2000-6000

4-Way, 2~6GHz, 400W

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	2~6GHz
Insertion Loss:	0.8dB max.
VSWR:	1.6 max.
Isolation:	15dB min.
Phase Balance:	10° max.
Amplitude Balance:	±0.5dB max.
Average Power:	400W max.

Mechanical


Size*1:	210*64.2*30mm 8.268*1.528*1.181in
Connectors:	SMA Female, N Female
Mounting:	5-Φ3mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	-55~+85°C
--------------	-----------

Outline Drawings

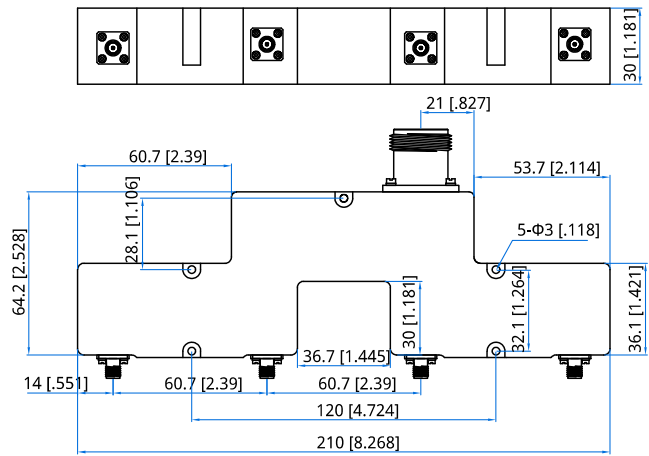

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

NPD4-2000-6000

Customization is available upon request.