

## NPD4-380-460

4-Way, 0.38~0.46GHz

**Features:**

- \* Small Size
- \* Low Insertion Loss

**Applications:**

- \* Amplifiers
- \* Mixers
- \* Antennas
- \* Laboratory Test

**Electrical**

---

Frequency:	0.38~0.46GHz
Insertion Loss:	0.5dB max.
Input VSWR:	1.25 max.
Output VSWR:	1.2 max.
Isolation:	20dB min.
Amplitude Balance:	0.3dB max.
Phase Balance:	±3°
Impedance:	50Ω
Average Power:	100W max.
IP Grade:	IP67

**Mechanical**

---

Size*1:	150*118*30mm
	5.906*4.646*1.181in
Connectors:	7/16 DIN Female


[1] Exclude connectors.

**Environmental**

---

Operation Temperature: -35~+70°C

**Outline Drawings**

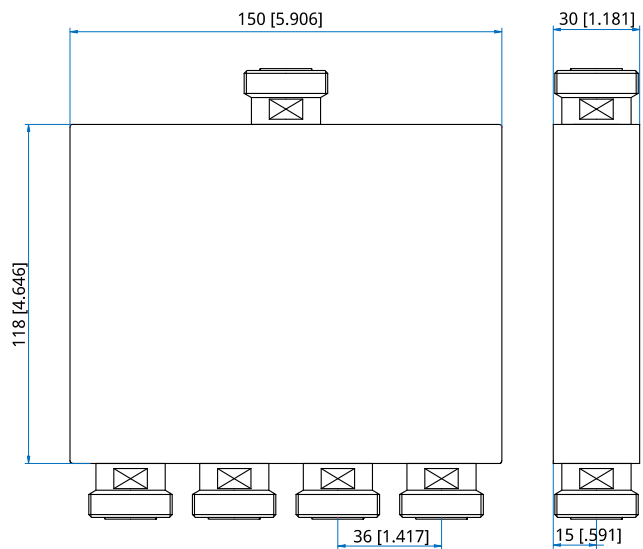

Unit: mm [in]  
Tolerance: ±0.5mm [±0.02in]

**How To Order**

**NPD4-380-460**

Customization is available upon request.

