

## NPD4-700-2700-30-S

4-Way, 0.7~2.7GHz

### Features:

- \* Small Size
- \* Low Insertion Loss

### Applications:

- \* Amplifiers
- \* Mixers
- \* Antennas
- \* Laboratory Test

### Electrical

Frequency:	0.7~2.7GHz
Insertion Loss:	0.6dB max.
Input VSWR:	1.25 max.
Output VSWR:	1.2 max.
Isolation:	18dB min.
Amplitude Balance:	0.3dB max.
Phase Balance:	±4° max.
Impedance:	50Ω
Average Power:	30W max. 2W max. as combiner

### Mechanical


Size*1:	52*64*12mm 2.047*2.52*0.472in
Weight:	95g
Connectors:	SMA Female
Mounting:	4-Φ2.8mm through-hole

[1] Exclude connectors.

### Environmental

Operation Temperature:	-35~+75°C
------------------------	-----------

### Outline Drawings

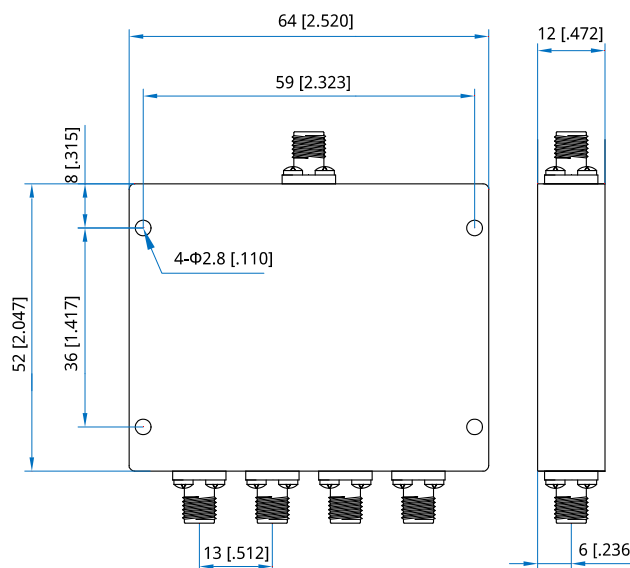

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

### How To Order

**NPD4-700-2700-30-S**

Customization is available upon request.