



## 8-Way Power Divider/Combiner

### NPD8-4900-5900-30-S

8-Way, 4.9~5.9GHz

#### Features:

- \* Small Size
- \* Low Insertion Loss

#### Applications:

- \* Amplifiers
- \* Mixers
- \* Antennas
- \* Laboratory Test

#### Electrical

Frequency:	4.9~5.9GHz
Insertion Loss:	0.8dB max.
Input VSWR:	1.3 max.
Output VSWR:	1.2 max.
Isolation:	20dB min.
Amplitude Balance:	0.3dB max.
Phase Balance:	$\pm 3^\circ$
Impedance:	50 $\Omega$
Average Power:	30W max. 2W max. as combiner

#### Mechanical


Size* <sup>1</sup> :	63*108*10mm 2.48*4.252*0.394in
Connectors:	SMA Female
Mounting:	4- $\Phi$ 2.8mm through-hole

[1] Exclude connectors.

#### Environmental

Operation Temperature:	-45~+85°C
------------------------	-----------

#### Outline Drawings

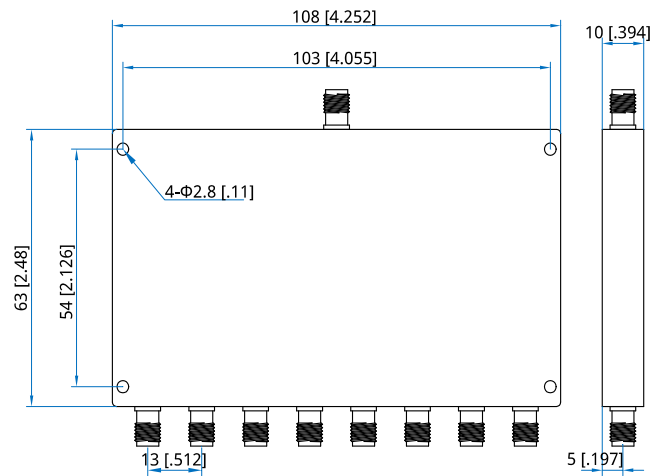

Unit: mm [in]

Tolerance:  $\pm 0.5$ mm [ $\pm 0.02$ in]

#### How To Order

**NPD8-4900-5900-30-S**

Customization is available upon request.