

## NHC9-2000-8000-20-S

2~8GHz, 20W

**Features:**

- \* Broadband
- \* High Power
- \* Low Insertion Loss

**Applications:**

- \* Amplifiers
- \* Transmitter
- \* Laboratory Test
- \* Radar

**Electrical**

---

Frequency:	2~8GHz
Insertion Loss:	0.8dB max.
VSWR:	1.4 max.
Isolation:	18dB min.
Amplitude Balance:	±0.8dB max.
Phase Balance:	±8°
Impedance:	50Ω
Average Power:	20W

**Mechanical**

---


Size <sup>*1</sup> :	60*25*11mm 2.36*0.99*0.43in
Connectors:	SMA Female
Mounting:	4-Φ2.3mm through-hole

[1] Exclude connectors.

**Environmental**

Operation Temperature: -45~+85°C

**Outline Drawings**

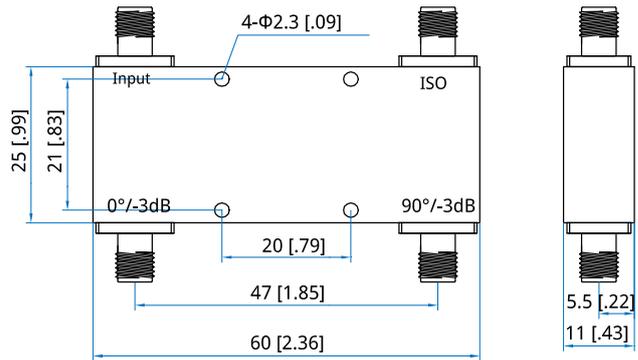

Unit: mm [in]  
Tolerance: ±0.5mm [±0.02in]

**How To Order**

**NHC9-2000-8000-20-S**

Customization is available upon request.

