

NC1-FL4G-S23-01
1.0mm Connector, DC~110GHz

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency: DC~110GHz
VSWR: 1.35 max.
Impedance: 50Ω


Mechanical

RF Connector: 1.0mm female
Outer Conductor: Passivated SUS303 stainless steel
Inner Conductor: Gold plated beryllium copper
Accept PIN: Φ0.23mm

Environmental

Temperature: -55~+85°C

Outline Drawings

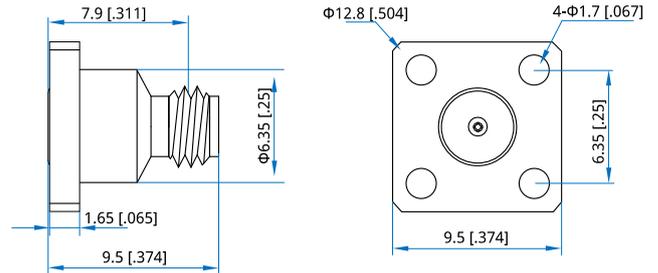

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order
NC1-FL4G-S23-01

Customization is available upon request.

