

# NCK-FB-B127-01

## 2.92mm Connector, DC~40GHz

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics

### Electrical

Frequency:	DC~40GHz
VSWR:	1.15 max.
Impedance of Dielectric:	3000MΩ min.
Impedance of Inner Conductor:	3mΩ max.
Impedance of Outer Conductor:	2mΩ max.
Voltage Withstand:	750V DC
Impedance:	50Ω


### Mechanical

RF Connector:	2.92mm Female
Mating Life Cycle:	500 cycles
Outer Conductor:	Gold Plated Brass
Dielectric:	PEI & PTFE or PEI
Inner Conductor:	Gold Plated Beryllium Copper

### Environmental

Temperature:	-55~+165°C
--------------	------------

### Outline Drawings

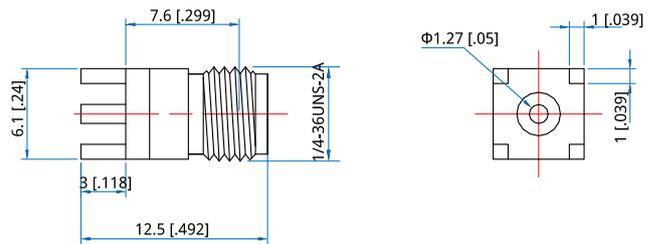

Unit: mm [in]  
Tolerance: ±0.2mm [±0.008in]

### How To Order

#### NCK-FB-B127-01

Customization is available upon request.

