

## NCN-ML4G-S-02

N Connector, DC~18GHz

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics

### Electrical

|                               |             |
|-------------------------------|-------------|
| Frequency:                    | DC~18GHz    |
| VSWR:                         | 1.15 max.   |
| Impedance of Dielectric:      | 5000MΩ min. |
| Impedance of Inner Conductor: | 1mΩ max.    |
| Impedance of Outer Conductor: | 0.2mΩ max.  |
| Voltage Withstand:            | 1500V DC    |
| Impedance:                    | 50Ω         |


### Mechanical

|                    |                                   |
|--------------------|-----------------------------------|
| RF Connector:      | N Male                            |
| Mating Life Cycle: | 500 cycles                        |
| Outer Conductor:   | Passivated SUS303 Stainless Steel |
| Dielectric:        | PEI & PTFE                        |
| Inner Conductor:   | Gold Plated Beryllium Copper      |
| Accept PIN:        | ΦDmm, depth 2.5mm max.            |

### Environmental

|              |            |
|--------------|------------|
| Temperature: | -55~+165°C |
|--------------|------------|

### Outline Drawings

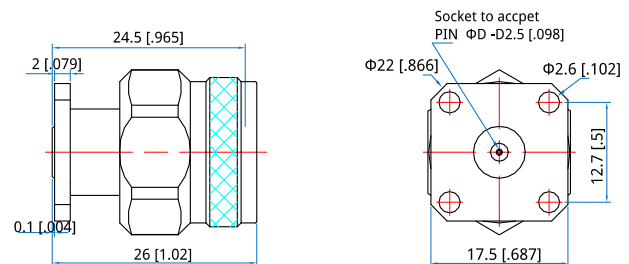

| Size | D     |      |       |
|------|-------|------|-------|
| mm   | 0.46  | 0.51 | 0.91  |
| in   | 0.018 | 0.02 | 0.036 |

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

### How To Order

NCN-ML4G-S46-02 - ΦD: Φ0.46mm

NCN-ML4G-S51-02 - ΦD: Φ0.51mm

NCN-ML4G-S91-02 - ΦD: Φ0.91mm

Customization is available upon request.