

NCS-FB-B30

SMA Connector, DC~26.5GHz

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC~26.5GHz
VSWR:	1.15 max.
Impedance of Dielectric:	5000MΩ min.
Impedance of Inner Conductor:	3mΩ max.
Impedance of Outer Conductor:	2mΩ max.
Voltage Withstand:	1000V DC
Impedance:	50Ω


Mechanical

RF Connector:	SMA Female
Mating Life Cycle:	500 cycles
Outer Conductor:	Gold Plated Brass
Dielectric:	PEI & PTFE
Inner Conductor:	Gold Plated Beryllium Copper


Environmental

Temperature:	-55~+165°C
--------------	------------

Outline Drawings

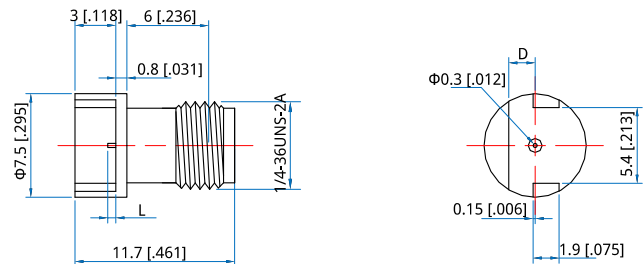

Part Number	D	L	Plate Thickness
NCS-FB-B30-01	1.93 [.076]	0.6 [.023]	1.78 [.07]
NCS-FB-B30-02	0.76 [.03]	0.6 [.023]	0.61 [.024]
NCS-FB-B30-03	1.02 [.04]	0.6 [.023]	0.87 [.034]
NCS-FB-B30-04	2.45 [.096]	0.6 [.023]	2.3 [.091]

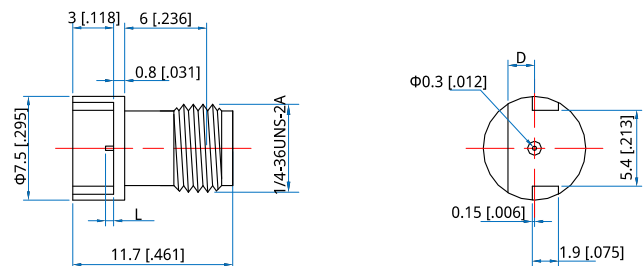

Part Number	D	L	Plate Thickness
NCS-FB-B30-05	1.93 [.076]	1.22 [.048]	1.78 [.07]
NCS-FB-B30-06	0.76 [.03]	1.22 [.048]	0.61 [.024]
NCS-FB-B30-07	1.02 [.04]	1.22 [.048]	0.87 [.034]
NCS-FB-B30-08	2.45 [.096]	1.22 [.048]	2.3 [.091]

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]