

NBF-10200-10800-30

10.2~10.8GHz, 30dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical


Frequency:	10.2~10.8GHz
Passband Insertion Loss:	1.5dB max.
Stopband Attenuation:	30dB@10GHz min. 30dB@11GHz min.
VSWR:	1.5 max.

Mechanical

Size ^{*1} :	80.73*17*19mm 3.178*0.669*0.748in
RF Connectors:	SMA Male, SMA Female
Mounting:	4-Φ2.3mm through-hole

[1] Exclude connectors.

Outline Drawings

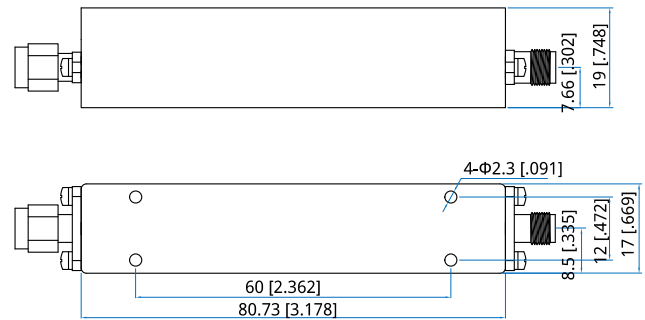

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

NBF-10200-10800-30

Customization is available upon request.

