

NBF-10200-12300-90

10.2~12.3GHz, 90dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	10.2~12.3GHz
Passband Insertion Loss:	1dB max.
Passband VSWR:	1.5 max.
Stopband Attenuation:	90dBc@DC~7.5GHz min. 90dBc@15.52~20GHz min.


Mechanical

RF Connectors:	SMA Female
Mounting:	4-M2 through-hole

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

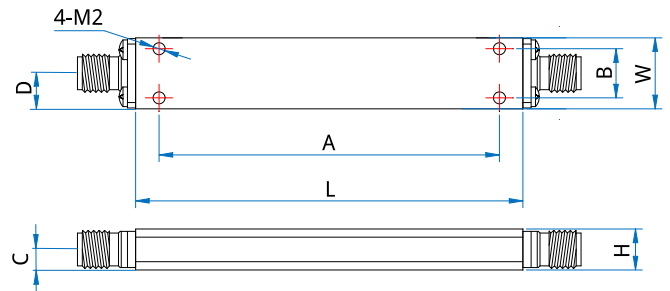

Size	L	W	H	A	B	C	D
mm	54	15	9	45.4	8.5	4.5	8
in	2.126	0.591	0.354	1.787	0.335	0.177	0.315

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

NBF-10200-12300-90

Customization is available upon request.

