

**NBF-10425-10575-30**  
 10.425~10.575GHz, 30dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**


Frequency:	10.425~10.575GHz
Passband Insertion Loss:	1.0dB max.
Stopband Attenuation:	30dB@10.2GHz min. 30dB@10.8GHz min.
VSWR:	1.3 max.

**Mechanical**

Size <sup>*1</sup> :	50.5*17*11.5mm 1.988*0.669*0.453in
RF Connectors:	SMA Female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors.

**Outline Drawings**

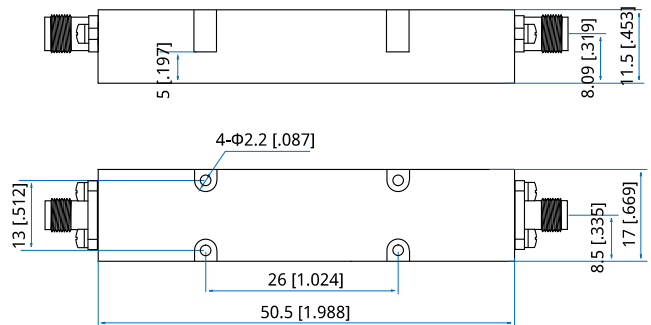

Unit: mm [in]  
 Tolerance: ±0.2mm [±0.008in]

**How To Order**

**NBF-10425-10575-30**

Customization is available upon request.

