

NBF-15000-16000-40

High Stopband Rejection

- | | |
|---|--|
| Features:
* High Stopband Rejection
* Small Size | Applications:
* Telecom
* Laboratory Test
* Receivers
* Instrumentation |
|---|--|

Electrical

Passband:	15~16GHz
Passband Insertion Loss:	2dB max.
VSWR:	1.5 max.
Stopband Attenuation:	40dBc@DC~14.5GHz min. 40dBc@16.5~18GHz min.


Mechanical

RF Connectors:	SMA Female
Mounting:	4*Φ2.2mm through-hole

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

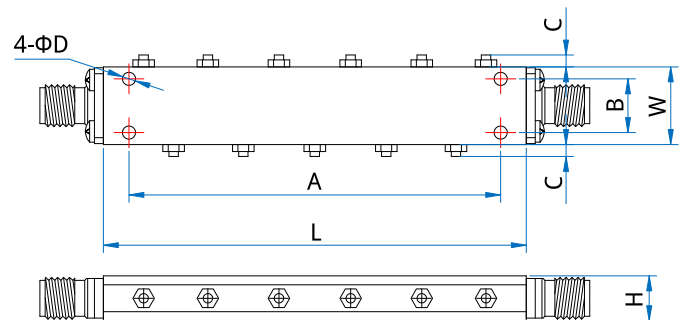

Size	L	W	H	A	B	C	D
mm	71	13	7.5	62.4	9	2	2.2
in	2.795	0.512	0.295	2.457	0.354	0.079	0.087

Unit: mm [in]
 Tolerance: ±0.2mm [±0.008in]

How To Order

NBF-15000-16000-40

Customization is available upon request.