

# NBF-16000-16200-40

## High Stopband Rejection

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Passband:	16~16.2GHz
Passband Insertion Loss:	1.5dB max.
VSWR:	1.5 max.
Stopband Attenuation:	40dBc@DC~15.76GHz min. 40dBc@16.44~18GHz min.


**Mechanical**

RF Connectors:	SMA Female
Mounting:	4*Φ2.2mm through-hole

**Environmental**

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

**Outline Drawings**

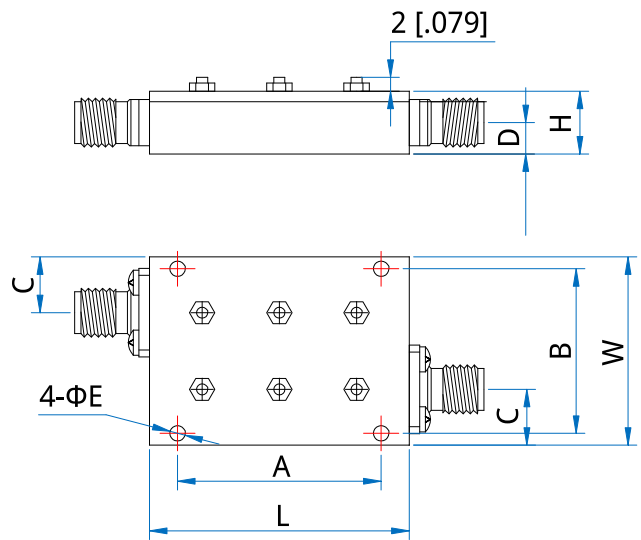

Size	L	W	H	A	B	C	D	E
mm	37	27	9	29	23.6	8	4.5	2.2
in	1.457	1.063	0.354	1.142	0.929	0.315	0.177	0.087

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

**HowTo Order**

**NBF-16000-16200-40**

Customization is available upon request.