

NBF-18000-23000-50

High Stopband Rejection

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	18~23GHz
Passband Insertion Loss:	1dB max.
Passband VSWR:	1.6 max.
Stopband Attenuation:	50dBc@17GHz min. 50dBc@25GHz min.


Mechanical

RF Connectors:	SMA Female
Mounting:	4*Φ2.2mm through-hole

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

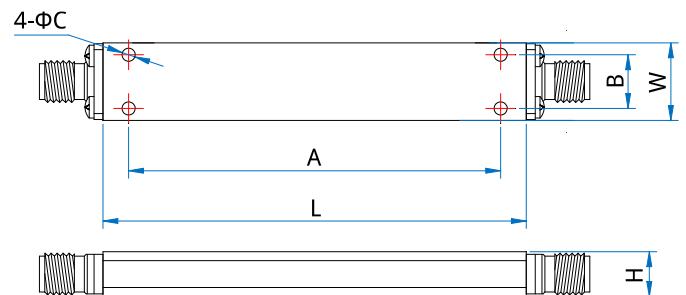

Size	L	W	H	A	B	C
mm	50.8	13	7	44.8	9	2.2
in	2	0.512	0.276	1.764	0.354	0.087

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

[NBF-18000-23000-50](#)

Customization is available upon request.