

**NBF-18000-25000-80**

18~25GHz, 80dB

Features:

- \* High Stopband Rejection
- \* Small Size

Applications:

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Passband:	18~25GHz
Passband Insertion Loss:	1.5dB max.
Passband VSWR:	1.8 max.
Stopband Attenuation:	80dBc@DC~14GHz min. 80dBc@29~35GHz min.


**Mechanical**

RF Connectors:	2.92mm Female
Mounting:	4-M2 through-hole

**Environmental**

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

**Outline Drawings**

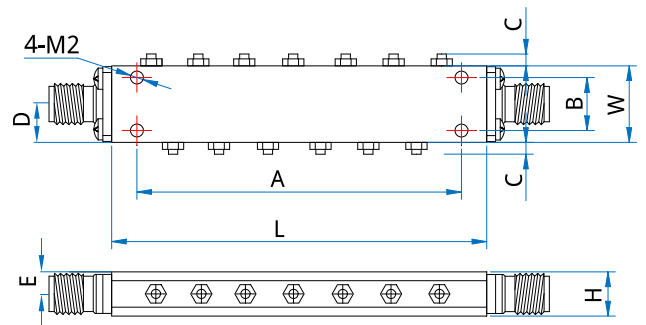

Size	L	W	H	A	B	C	D	E
mm	48	13	7	40	9	2	6.5	3.5
in	1.89	0.512	0.276	1.575	0.354	0.079	0.256	0.138

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

**How To Order**

**NBF-18000-25000-80**

Customization is available upon request.