

NBF-1980-2010-80

1.98~2.01GHz, 80dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	1.98~2.01GHz
Passband Width:	30MHz
Passband Insertion Loss:	1.5dB max.
Stopband Attenuation:	80dB@DC~1.82GHz min. 80dB@2.17~2.2GHz min.
VSWR:	1.5 max.
Average Power:	60W

Mechanical


Size*1:	78*54*24mm 3.071*2.126*0.945in
RF Connectors:	SMA Female
Mounting:	4-Φ2.8mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

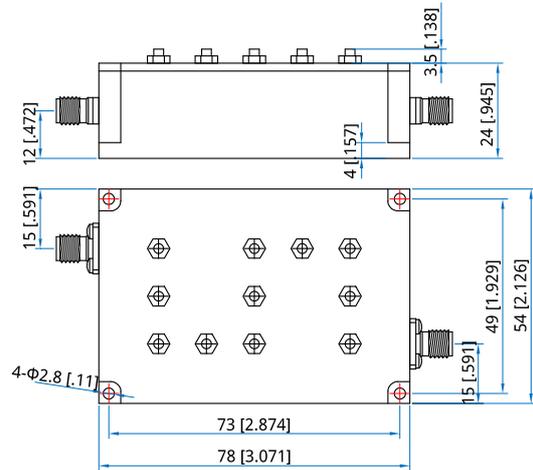

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

NBF-1980-2010-80

Customization is available upon request.

