

## NBF-2025-2120-50

### High Stopband Rejection

<b>Features:</b> * High Stopband Rejection * Small Size	<b>Applications:</b> * Telecom * Laboratory Test * Receivers * Instrumentation
---	--

#### Electrical

Passband:	2.025~2.12GHz
Passband Ripple:	1dB max.
Insertion Loss at CF:	2dB max.
VSWR:	1.3dB max.
Stopband Attenuation:	50dB@1.95GHz min. 50dB@2.2~2.3GHz min.

#### Mechanical


Size*1:	75*52*21mm 2.953*2.047*0.827in
RF Connectors:	SMA Female
Mounting:	4*Φ2.8 Through-hole

[1] Exclude connectors.

#### Environmental

Working Temperature:	-40~+75°C
Storage Temperature:	-55~+85°C

#### Outline Drawings

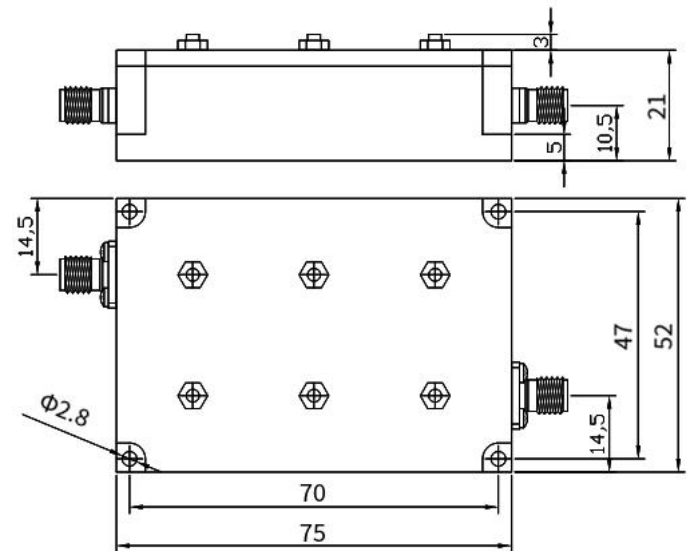

Unit: mm  
Tolerance: ±0.2mm

How To Order  
[NBF-2025-2120-50](#)

Customization is available upon request.