

NBF-21000-28000-50

21~28GHz, 50dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	21~28GHz
Passband Insertion Loss:	1dB max.
VSWR:	1.6 max.
Stopband Attenuation:	65dB@DC~19GHz min. 50dB@30~35GHz min.


Mechanical

RF Connectors:	2.92mm Female
Mounting:	4-Φ2.2mm through-hole

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

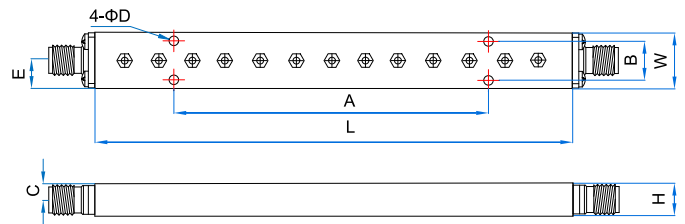

Size	L	W	H	A	B	C	D	E
mm	65.5	16	11	47.5	11	6.2	2.2	8
in	2.579	0.63	0.354	1.87	0.433	0.244	0.087	0.315

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

NBF-21000-28000-50

Customization is available upon request.

