

NBF-2300-2500-45

2.3~2.5GHz, 45dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	2.3~2.5GHz
-1dB Passband Width:	200MHz min.
Passband Insertion Loss:	3dB max.
Stopband Attenuation:	45dB@2.05GHz min. 45dB@2.75GHz min.
VSWR:	1.5 max.

Mechanical


Size ^{*1} :	35*12*8mm 1.378*0.472*0.315in
RF Connectors:	SMA female
Mounting:	4-M2 depth 5mm

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

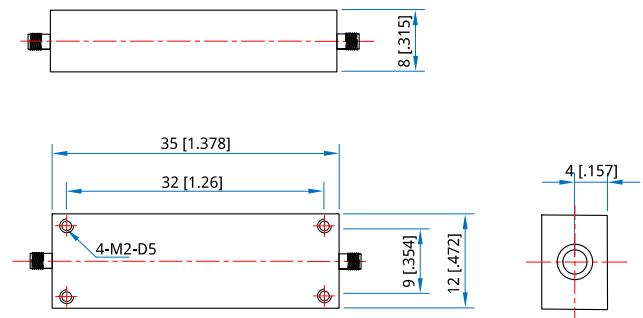

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

NBF-2300-2500-45

Customization is available upon request.

