

## NBF-2400-2500-50

2.4~2.5GHz, 50dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Passband:	2.4~2.5GHz
Passband Insertion Loss:	1dB max.
VSWR:	1.3 max.
Stopband Attenuation:	50dB@DC~2.05GHz min. 50dB@2.85~5GHz min.
Impedance:	50Ω
Average Power:	5W max.

**Mechanical**


Size*1:	70*21*21mm 2.756*0.827*0.827in
Connectors:	SMA Female
Mounting:	4-M2.5 through hole

[1] Exclude connectors.

**Environmental**

Temperature:	-30~+70°C
--------------	-----------

**Outline Drawings**

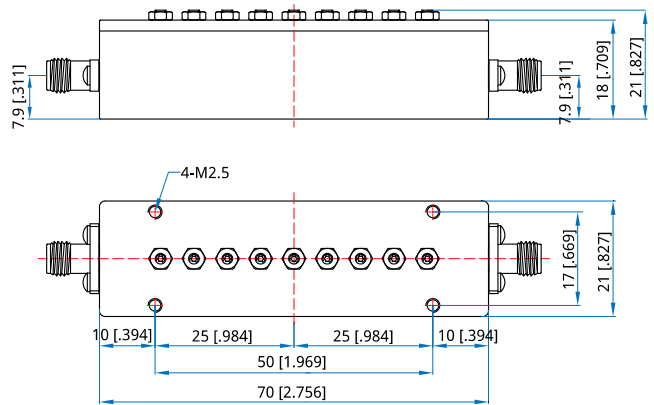

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

**How To Order**

**NBF-2400-2500-50**

Customization is available upon request.

