

## NBF-24000-26000-35

24~26GHz, 35dB

### Features:

- \* High Stopband Rejection
- \* Small Size

### Applications:

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

### Electrical

Passband:	24~26GHz
Passband Insertion Loss:	2dB max.
Passband VSWR:	1.5 max.
Stopband Attenuation:	35dBc@DC~23GHz min. 35dBc@27~40GHz min.

### Mechanical

Connectors:	2.92mm Female
Mounting:	4-M2 through-hole

### Environmental


Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

### How To Order

**NBF-24000-26000-35**

Customization is available upon request.

### Outline Drawings

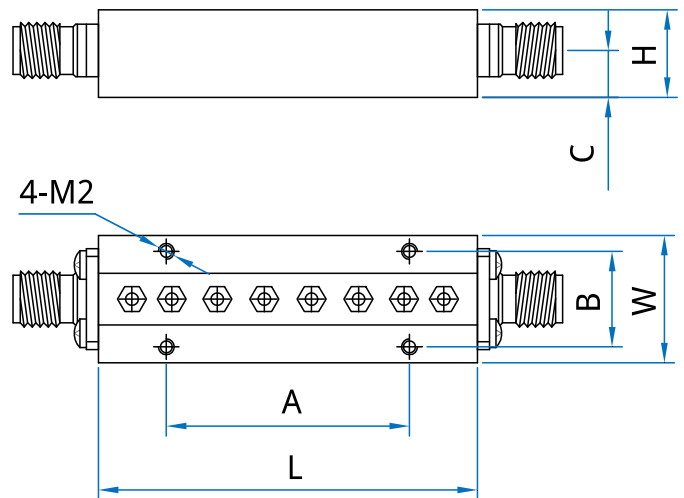

Size	L	W	H	A	B	C
mm	45.5	16	11	28.5	12	5.9
in	1.791	0.63	0.433	1.122	0.472	0.232

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]