

NBF-24000-29500-10

24~29.5GHz, 10dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	24~29.5GHz
Passband Insertion Loss:	2dB max.
VSWR:	1.5 max.
Average Power:	30W typ.
Stopband Attenuation:	10dBc@23GHz min. 10dBc@30.5GHz min.

Mechanical

RF Connectors:	2.92mm Female
Mounting:	4-M2 through-hole

Environmental


Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

How To Order

NBF-24000-29500-10

Customization is available upon request.

Outline Drawings

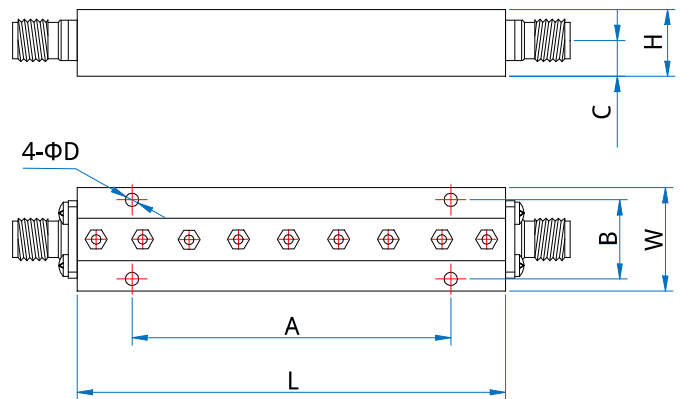

Size:	L	W	H	A	B	C	D
mm:	49.7	16	11	31.7	12	6	2
in:	1.957	0.63	0.433	1.248	0.472	0.236	0.079

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]