

# NBF-24000-34000-40

24~34GHz, 40dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

---

Passband:	24~34GHz
Passband Insertion Loss:	1.5dB max.
VSWR:	1.8 max.
Stopband Attenuation:	40dB@DC~20GHz min.
	40dB@37~55GHz min.
Average Power:	30W

**Mechanical**

---

Size <sup>*1</sup> :	35*13*7mm
	1.378*0.512*0.276in
Connectors:	2.92mm Female
Mounting:	4-Φ2.2mm through hole


[1] Exclude connectors.

**Environmental**

---

Temperature:	-18~+40°C
--------------	-----------

**Outline Drawings**

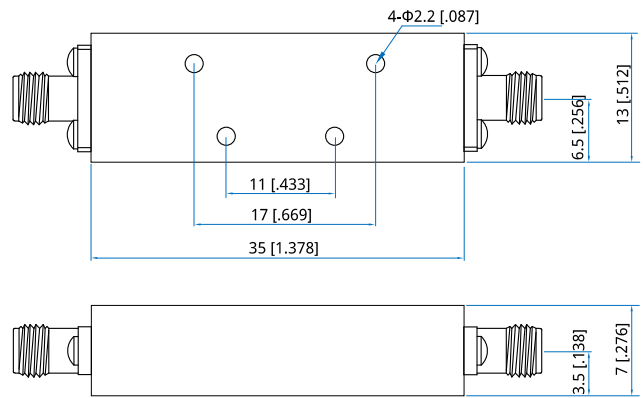

Unit: mm [in]  
Tolerance: ±0.2mm [±0.008in]

**How To Order**

**NBF-24000-40000-40**

Customization is available upon request.

