

NBF-26000-28000-60

26~28GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	26~28GHz
Passband Insertion Loss:	2dB max.
Passband VSWR:	1.5 max.
Stopband Attenuation:	60dBc@DC~23GHz min. 60dBc@31~40GHz min.

Mechanical

Connectors:	2.92mm Female
Mounting:	4-M2 through-hole

Environmental


Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

How To Order

[NBF-26000-28000-60](#)

Customization is available upon request.

Outline Drawings

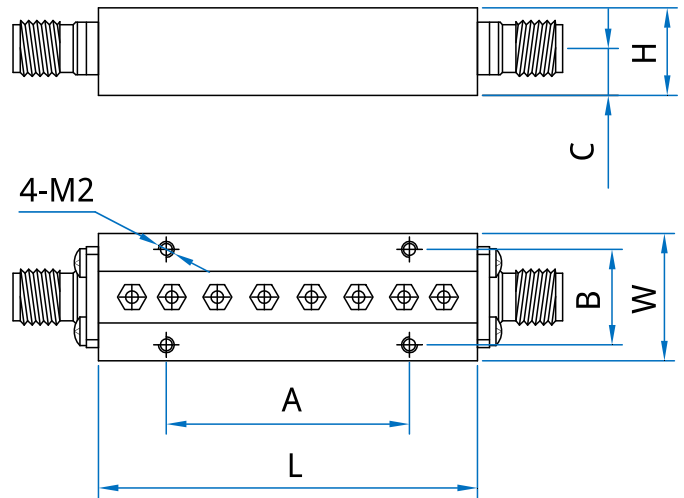

Size	L	W	H	A	B	C
mm	47.4	16	11	30.4	12	5.9
in	1.866	0.63	0.433	1.197	0.472	0.232

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]