

**NBF-26300-29700-60**  
26.3GHz~29.7GHz, 60dB

- |  |   |
|--|---|
| <p>Features:</p> <ul style="list-style-type: none"> <li>* High Stopband Rejection</li> <li>* Small Size</li> </ul> | <p>Applications:</p> <ul style="list-style-type: none"> <li>* Telecom</li> <li>* Laboratory Test</li> <li>* Receivers</li> <li>* Instrumentation</li> </ul> |
|--|---|

**Electrical**

Passband:	26.3~29.7GHz
Passband Insertion Loss:	2dB max.
Passband Ripple:	0.5dB max.
VSWR:	1.5 max.
Stopband Attenuation:	60dBc@DC~24.8GHz min. 60dBc@32~40GHz min.
Average Power:	0.5W min.


**Mechanical**

RF Connectors:	2.92mm Female, removable Φ0.38mm inner pin
Mounting:	4*Φ2.2mm through-hole

**Environmental**

Operating Temperature:	0~+55°C
Non-operating Temperature:	-55~+85°C

**Outline Drawings**

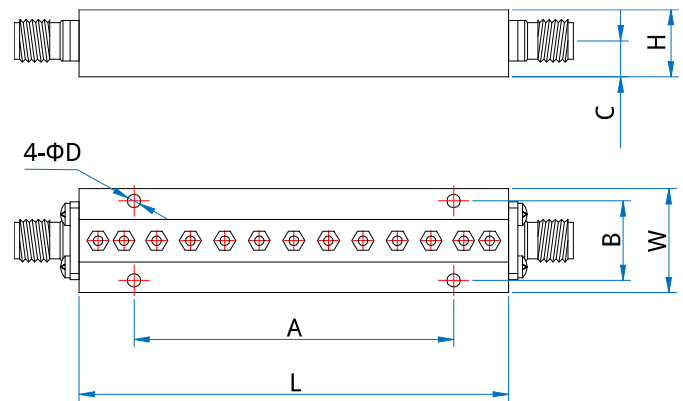

Size	L	W	H	A	B	C	D
mm	71.5	17	11	51.5	13	6.1	2.2
in	2.815	0.669	0.433	2.028	0.512	0.24	0.087

Unit: mm [in]  
Tolerance: ±0.2mm [±0.008in]

**How To Order**

**NBF-26300-29700-60**

Customization is available upon request.

