

**NBF-27485-31315-50**

27.485GHz~31.315GHz, 50dB

Features:

- \* High Stopband Rejection
- \* Small Size

Applications:

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation



**Electrical**

Passband:	27.485~31.315GHz
Passband Insertion Loss:	2.0dB max.
VSWR:	1.5 max.
Stopband Attenuation:	60dBc@26GHz min. 50dBc@32.3GHz min.


**Mechanical**

RF Connectors:	2.92mm Female
Mounting:	4*Φ2.2mm through-hole

**Environmental**

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

**Outline Drawings**

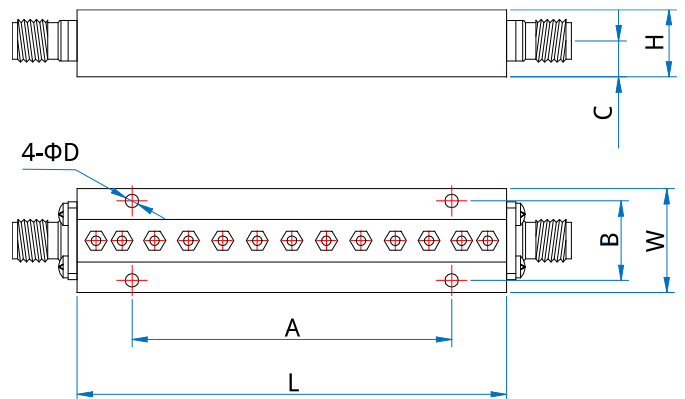

Size	L	W	H	A	B	C	D
mm	70.4	17	11	52.4	13	5.9	2.2
in	2.772	0.669	0.433	2.063	0.512	0.232	0.087

Unit: mm [in]  
Tolerance: ±0.2mm [±0.008in]

**How To Order**

**NBF-27485-31315-50**

Customization is available upon request.

