

## NBF-27500-28500-60

27.5~28.5GHz, 60dB

### Features:

- \* High Stopband Rejection
- \* Small Size

### Applications:

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

### Electrical

Frequency:	27.5~28.5GHz
Passband Insertion Loss:	2dB max.
Stopband Attenuation:	60dB@26.6GHz min. 60dB@29.5GHz min.
VSWR:	1.6 max.

### Mechanical


Size <sup>*1</sup> :	56.3*14*7mm 2.217*0.551*0.276in
RF Connectors:	2.92mm Female
Mounting:	4-M2 through-hole

[1] Exclude connectors.

### Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

### Outline Drawings

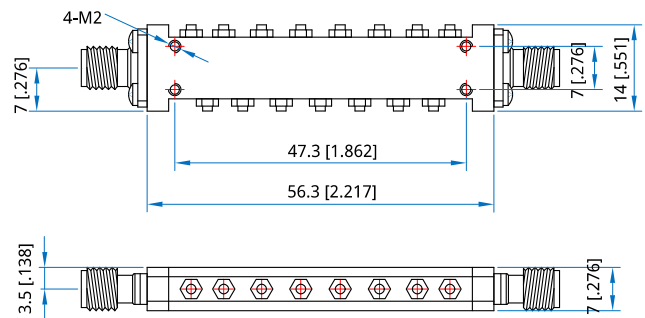

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

### How To Order

**NBF-27500-28500-60**

Customization is available upon request.