

NBF-300-600-30

300~600MHz, 30dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	300~600MHz
Passband Insertion Loss:	1.8dB max.
Passband VSWR:	1.5 max.
Stopband Attenuation:	30dBc@260MHz min. 30dBc@650MHz min.


Mechanical

RF Connectors:	SMA Female
Mounting:	4-M2 through-hole

Environmental

Operating Temperature:	-45~+85°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

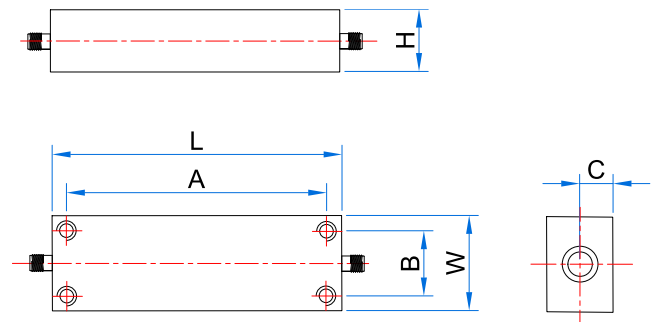

Size	L	W	H	A	B	C
mm	40.4	12	10	37.4	9	5
in	1.591	0.472	0.394	1.472	0.354	0.197

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

NBF-300-600-30

Customization is available upon request.

