

NBF-39700-40300-60

39.7~40.3GHz, 60dBc

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	39.7~40.3GHz
Passband Insertion Loss:	1.5dB max.
VSWR:	1.6 max.
Stopband Attenuation:	60dBc@DC~37.7GHz min. 60dBc@42.3~50GHz min.
Average Power:	20W

Mechanical


Size*1:	57*14*10mm 1.85*0.472*0.354in
RF Connectors:	2.92mm Male, 2.92mm Female
Mounting:	4-Φ2.3mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

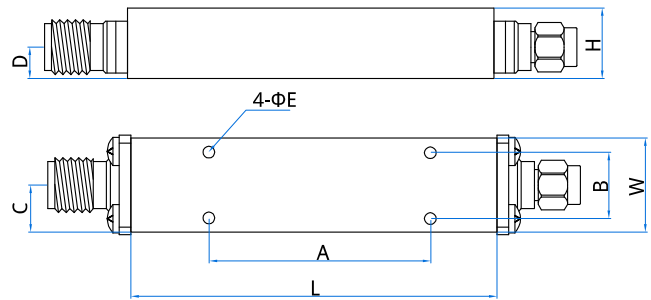

Size	L	W	H	A	B	C	D	E
mm	57	14	10	36	10	7	4.81	2.3
in	2.244	0.551	0.394	1.417	0.394	0.276	0.189	0.091

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

NBF-39700-40300-60

Customization is available upon request.

