

NBF-4000-6000-70

4~6GHz, 70dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	4~6GHz
Passband Insertion Loss:	2dB max.
Passband VSWR:	2 max.
Stopband Attenuation:	70dBc@DC~3.6GHz min. 70dBc@6.38~8GHz min.


Mechanical

RF Connectors:	SMA Female
Mounting:	4-M2 through-hole

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

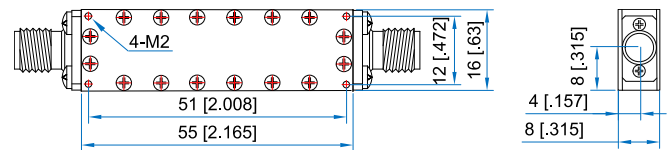

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

NBF-4000-6000-70

Customization is available upon request.

