

NBF-5841-6249-50

5.841~6.249GHz, 50dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	5.841~6.249GHz
Passband Insertion Loss:	1dB max.
Passband VSWR:	1.5 max.
Stopband Attenuation:	50dBc@DC~4.85GHz min. 50dBc@7.15~15GHz min.


Mechanical

RF Connectors:	SMA Female
Mounting:	4-M2 through-hole

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

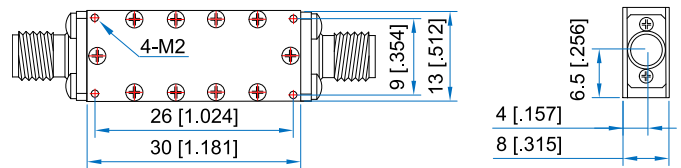

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

NBF-5841-6249-50

Customization is available upon request.

