

**NBF-7400-12600-40**

7.4~12.6GHz, 40dB

Features:

- \* High Stopband Rejection
- \* Small Size

Applications:

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Passband:	7.4~12.6GHz
Passband Insertion Loss:	1.5dB max.
Passband VSWR:	1.6 max.
Stopband Attenuation:	40dB@DC-6GHz max. 40dB@14-18GHz max.


**Mechanical**

RF Connectors:	SMA Female
Mounting:	4-M2 through-hole

**Environmental**

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

**Outline Drawings**

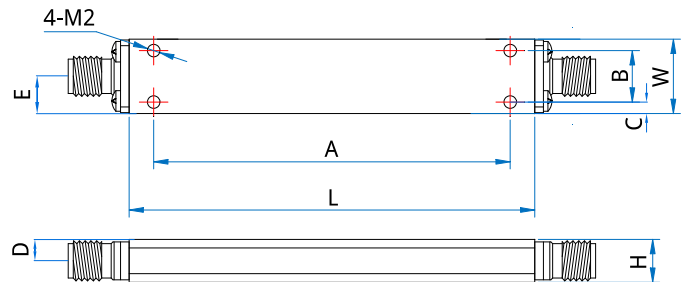

Size	L	W	H	A	B	C	D	E
mm	52	15	10	45	10	1.5	5	8.5
in	2.047	0.591	0.394	1.772	0.394	0.059	0.197	0.335

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

**How To Order**

**NBF-7400-12600-40**

Customization is available upon request.

