

# NBF-800-1200-45

0.8~1.2GHz, 45dBc

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Frequency:	0.8~1.2GHz
1dB Bandwidth:	400MHz min.
Passband Insertion Loss:	1dB max.
Stopband Attenuation:	45dBc@550MHz min. 45dBc@1450MHz min.
VSWR:	1.8 max.
Average Power:	40W

**Mechanical**


Size*1:	62*48*13mm 2.441*1.89*0.512in
RF Connectors:	SMA Female
Mounting:	4-M2 through-hole

[1] Exclude connectors.

**Environmental**

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

**Outline Drawings**

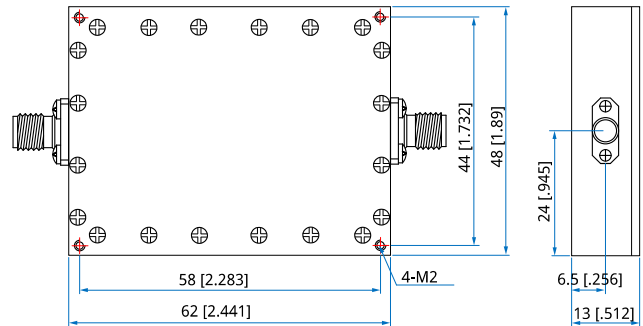

Unit: mm [in]  
Tolerance: ±0.2mm [±0.008in]

**How To Order**

**NBF-800-1200-45**

Customization is available upon request.

