

NBF-8192-16384-20

8192~16384MHz, 20dBc

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	8192~16384MHz
Passband Insertion Loss:	3dB max.
VSWR:	1.8 max.
Stopband Attenuation:	10dBc@7.5GHz min. 10dBc@17.1GHz min. 20dBc@7.1GHz min. 20dBc@17.5GHz min.


Mechanical

RF Connectors:	SMA Female
Mounting:	4-Φ2.2mm through-hole

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

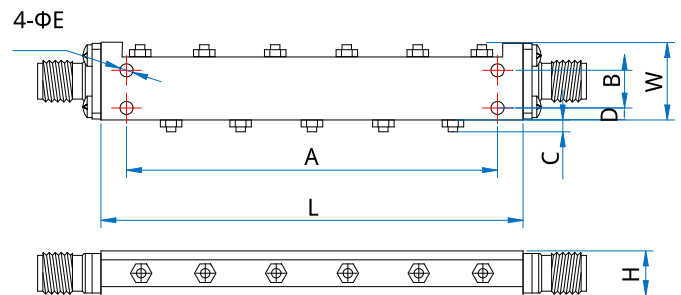

Size	L	W	H	A	B	C	D	E
mm	52	14.5	11.6	42.6	9	2	1.5	2.2
in	2.047	0.571	0.457	1.677	0.354	0.079	0.059	0.087

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

NBF-8192-16384-20

Customization is available upon request.

