

NC2-FG-T50-1

2.4mm Female

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency: DC~50GHz
VSWR: 1.3 max.
Impedance: 50Ω

Mechanical



RF Connector: 2.4mm Female
Mating Cable: NT50
Outer Conductor: 303F Stainless steel

How To Order

NC2-FG-T50-1

Customization is available upon request.

Outline Drawings

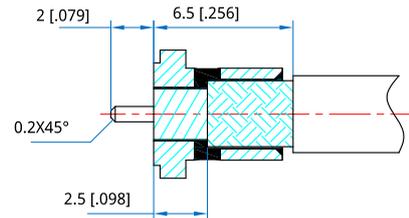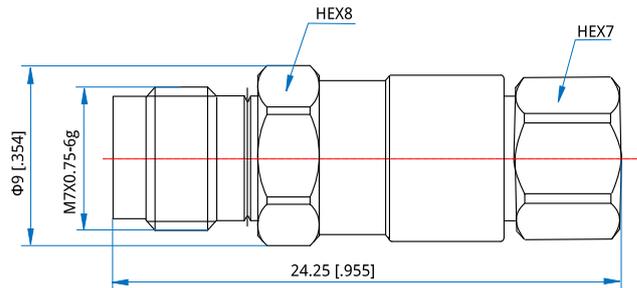

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]

