

NC2-MG-T50-2

2.4mm Male

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC~50GHz
VSWR:	1.3
Impedance of Dielectric:	5000M Ω min.
Voltage Withstand:	500V DC min.
Impedance:	50 Ω

Mechanical



RF Connector:	2.4mm Male
Mating Cable:	NT50, NA300
Outer Conductor:	303F stainless steel

How To Order

NC2-MG-T50-2

Customization is available upon request.

Outline Drawings

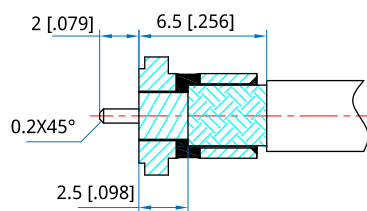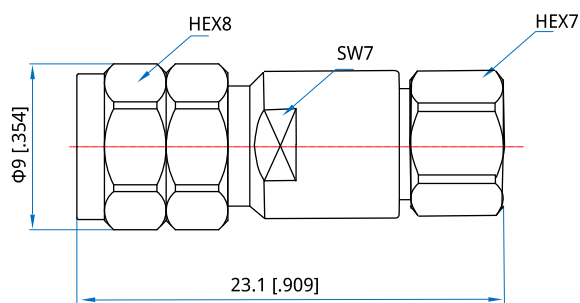

Unit: mm [in]

Tolerance: ± 0.2 mm [± 0.008 in]